

臂架组合方案

Boom / Jib combinations



主臂

Telescopic boom

T: 12.4~58m

副臂


Jib

T: 54.4~58m
J: 10.8~18.3 m

主臂加长节

Telescopic boom extension

T: 54.4~58m
I: 7m
J: 10.8~18.3m

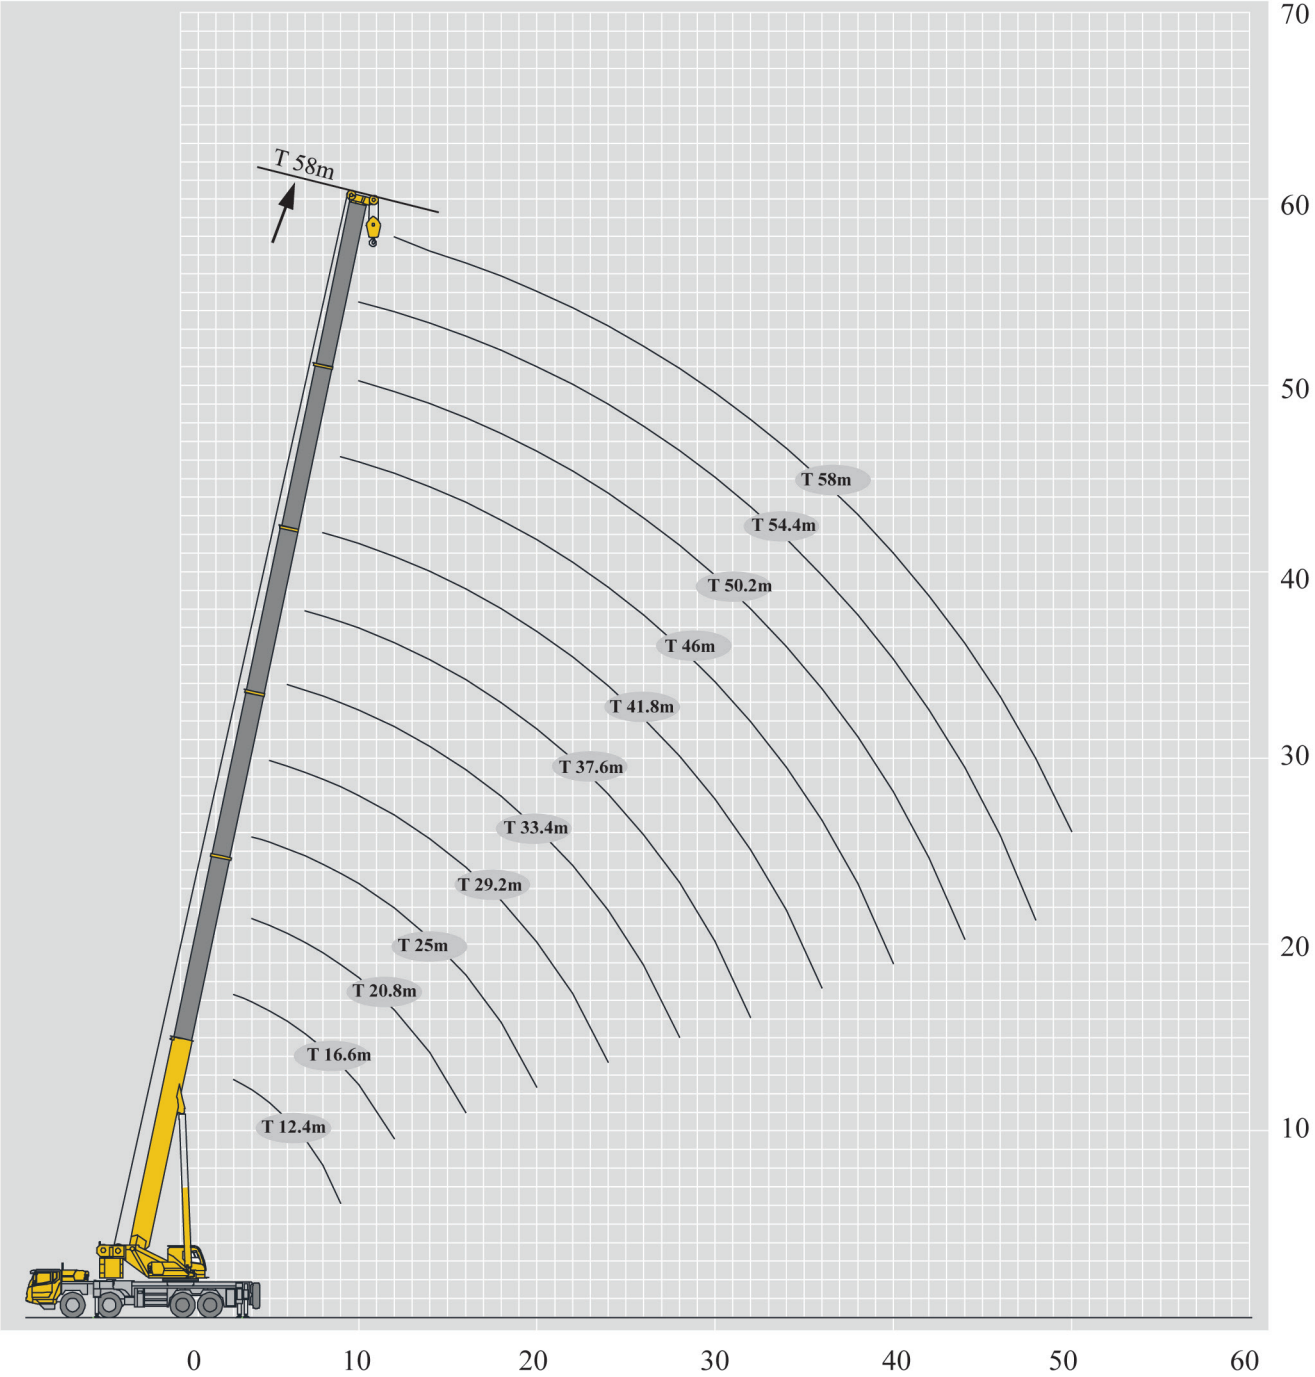

起重性能表
Lifting capacities

T 12.4~58m

12.4-58m 7.95m×7.9m 360° 29t														
	12.4	12.4m	16.6m	20.8 m	25m	29.2m	33.4m	37.6m	41.8m	46m	50.2m	54.4m	58m	
3	110*	90.0	80.0											3
3.5		90.0	80.0											3.5
4		88.0	78.0	72.0	65.0									4
4.5		79.0	74.0	69.0	65.0									4.5
5		70.0	68.0	66.0	62.0	55.0								5
6		60.0	59.0	59.0	56.0	55.0	46.0							6
7		50.0	51.0	50.0	50.0	50.0	43.0	36.4						7
8		44.0	44.0	44.0	44.0	45.0	40.0	33.0	27.4					8
9		37.0	40.0	40.0	39.0	40.0	36.0	29.2	25.7	23.2				9
10			35.0	36.0	35.0	35.0	33.0	27.1	24.0	21.8	19.4			10
12			29.2	29.0	28.4	30.0	30.0	23.9	21.2	19.6	17.5	15.0	13.5	12
14				24.0	24.8	24.2	23.5	21.6	18.9	17.8	15.7	13.9	13.0	14
16				19.5	19.6	19.6	19.1	18.7	16.9	16.1	14.5	13.1	12.0	16
18					16.5	16.2	16.2	15.8	15.2	14.6	13.2	12.2	11.2	18
20					13.9	13.7	14.2	13.6	12.6	12.8	12.1	11.3	10.4	20
22						12.4	12.2	11.6	11.2	11.2	11.2	10.2	9.3	22
24						10.8	10.5	10.2	9.8	10.1	9.6	9.3	8.4	24
26							9.2	9.4	9.1	9.1	8.7	8.5	7.8	26
28							8.1	8.3	8.0	7.9	8.1	7.6	7.2	28
30								7.4	7.4	7.0	7.0	6.7	6.6	30
32								6.5	6.6	6.3	6.1	5.9	5.9	32
34									5.9	5.6	5.4	5.2	5.2	34
36									5.2	5.0	4.8	4.5	4.5	36
38										4.6	4.2	4.0	4.0	38
40										4.1	3.8	3.5	3.5	40
42											3.3	3.0	3.0	42
44											2.9	2.7	2.7	44
46												2.3	2.3	46
48												2.0	2.1	48
50													1.8	50

说明：*为名义载荷，表示起重机能力等级。 Note: * means capacity class.

起重性能表
Lifting capacities


T 12.4~58m

	12.4-58m 7.95m×7.9m 360° 15.5t												
	12.4m	16.6m	20.8 m	25m	29.2m	33.4m	37.6m	41.8m	46m	50.2m	54.4m	58m	
3	90.0	80.0											3
3.5	90.0	80.0											3.5
4	88.0	78.0	72.0	65.0									4
4.5	79.0	74.0	69.0	65.0									4.5
5	70.0	68.0	66.0	62.0	55.0								5
6	60.0	59.0	59.0	56.0	55.0	46.0							6
7	49.0	51.0	50.0	50.0	50.0	43.0	36.4						7
8	39.0	43.8	43.0	43.5	45.0	40.0	33.0	27.4					8
9	30.0	35.5	35.1	36.6	37.3	36.0	29.2	25.7	23.2				9
10		29.9	30.0	31.1	30.9	30.3	27.1	24.0	21.8	19.4			10
12		21.6	22.5	22.7	22.5	22.0	21.4	21.2	19.6	17.5	15.0	13.5	12
14			17.3	17.5	17.9	18.1	17.5	16.5	16.5	15.7	13.9	13.0	14
16			14.0	14.4	14.8	14.5	14.2	13.6	13.8	13.4	13.1	12.0	16
18				12.1	12.2	11.9	12.2	12.1	11.7	11.6	11.2	11.2	18
20				10.1	10.2	9.9	10.2	10.2	10.0	9.6	9.2	9.3	20
22					8.6	8.4	8.7	8.7	8.4	8.1	7.7	7.8	22
24					7.4	7.1	7.4	7.4	7.2	6.9	6.5	6.5	24
26						6.1	6.4	6.4	6.2	5.8	5.5	5.5	26
28						5.2	5.5	5.5	5.3	5.0	4.6	4.7	28
30							4.8	4.8	4.5	4.3	3.9	3.9	30
32							4.1	4.1	3.9	3.6	3.3	3.3	32
34								3.6	3.3	3.1	2.7	2.7	34
36								3.1	2.9	2.6	2.2	2.3	36
38									2.4	2.2	1.8	1.8	38
40									2.0	1.8	1.4	1.5	40
42										1.4	1.1	1.1	42
44										1.2			44

起重性能表
Lifting capacities


T 12.4~58m

	12.4-58m 7.95m×7.9m 360° 0t												
	12.4m	16.6m	20.8 m	25m	29.2m	33.4m	37.6m	41.8m	46m	50.2m	54.4m	58m	
3	90.0	80.0											3
3.5	90.0	80.0											3.5
4	88.0	78.0	72.0	65.0									4
4.5	79.0	74.0	69.0	65.0									4.5
5	70.0	68.0	66.0	62.0	55.0								5
6	49.8	52.4	51.7	51.0	52.9	46.0							6
7	34.0	37.2	38.3	38.7	38.4	37.6	36.4						7
8	25.1	27.9	28.9	29.2	29.0	28.2	27.9	27.4					8
9	19.3	21.9	22.8	23.1	24.2	23.9	23.0	22.3	21.9				9
10		17.7	18.9	19.8	19.9	19.6	20.0	19.5	18.6	18.1			10
12		12.0	13.2	14.1	14.1	13.8	14.2	14.2	13.9	13.5	13.0	13.1	12
14			9.4	10.3	10.4	10.1	10.4	10.5	10.1	9.8	9.3	9.4	14
16			6.9	7.7	7.8	7.5	7.9	7.9	7.6	7.3	6.8	6.9	16
18				5.9	6.0	5.7	6.1	6.1	5.8	5.5	5.0	5.1	18
20				4.6	4.7	4.4	4.7	4.7	4.5	4.2	3.7	3.8	20
22					3.6	3.4	3.7	3.7	3.4	3.2	2.8	2.8	22
24					2.8	2.6	2.9	2.9	2.6	2.3	2.0	2.0	24
26						1.9	2.2	2.2	2.0	1.7	1.3	1.3	26
28						1.4	1.6	1.7	1.4	1.1			28

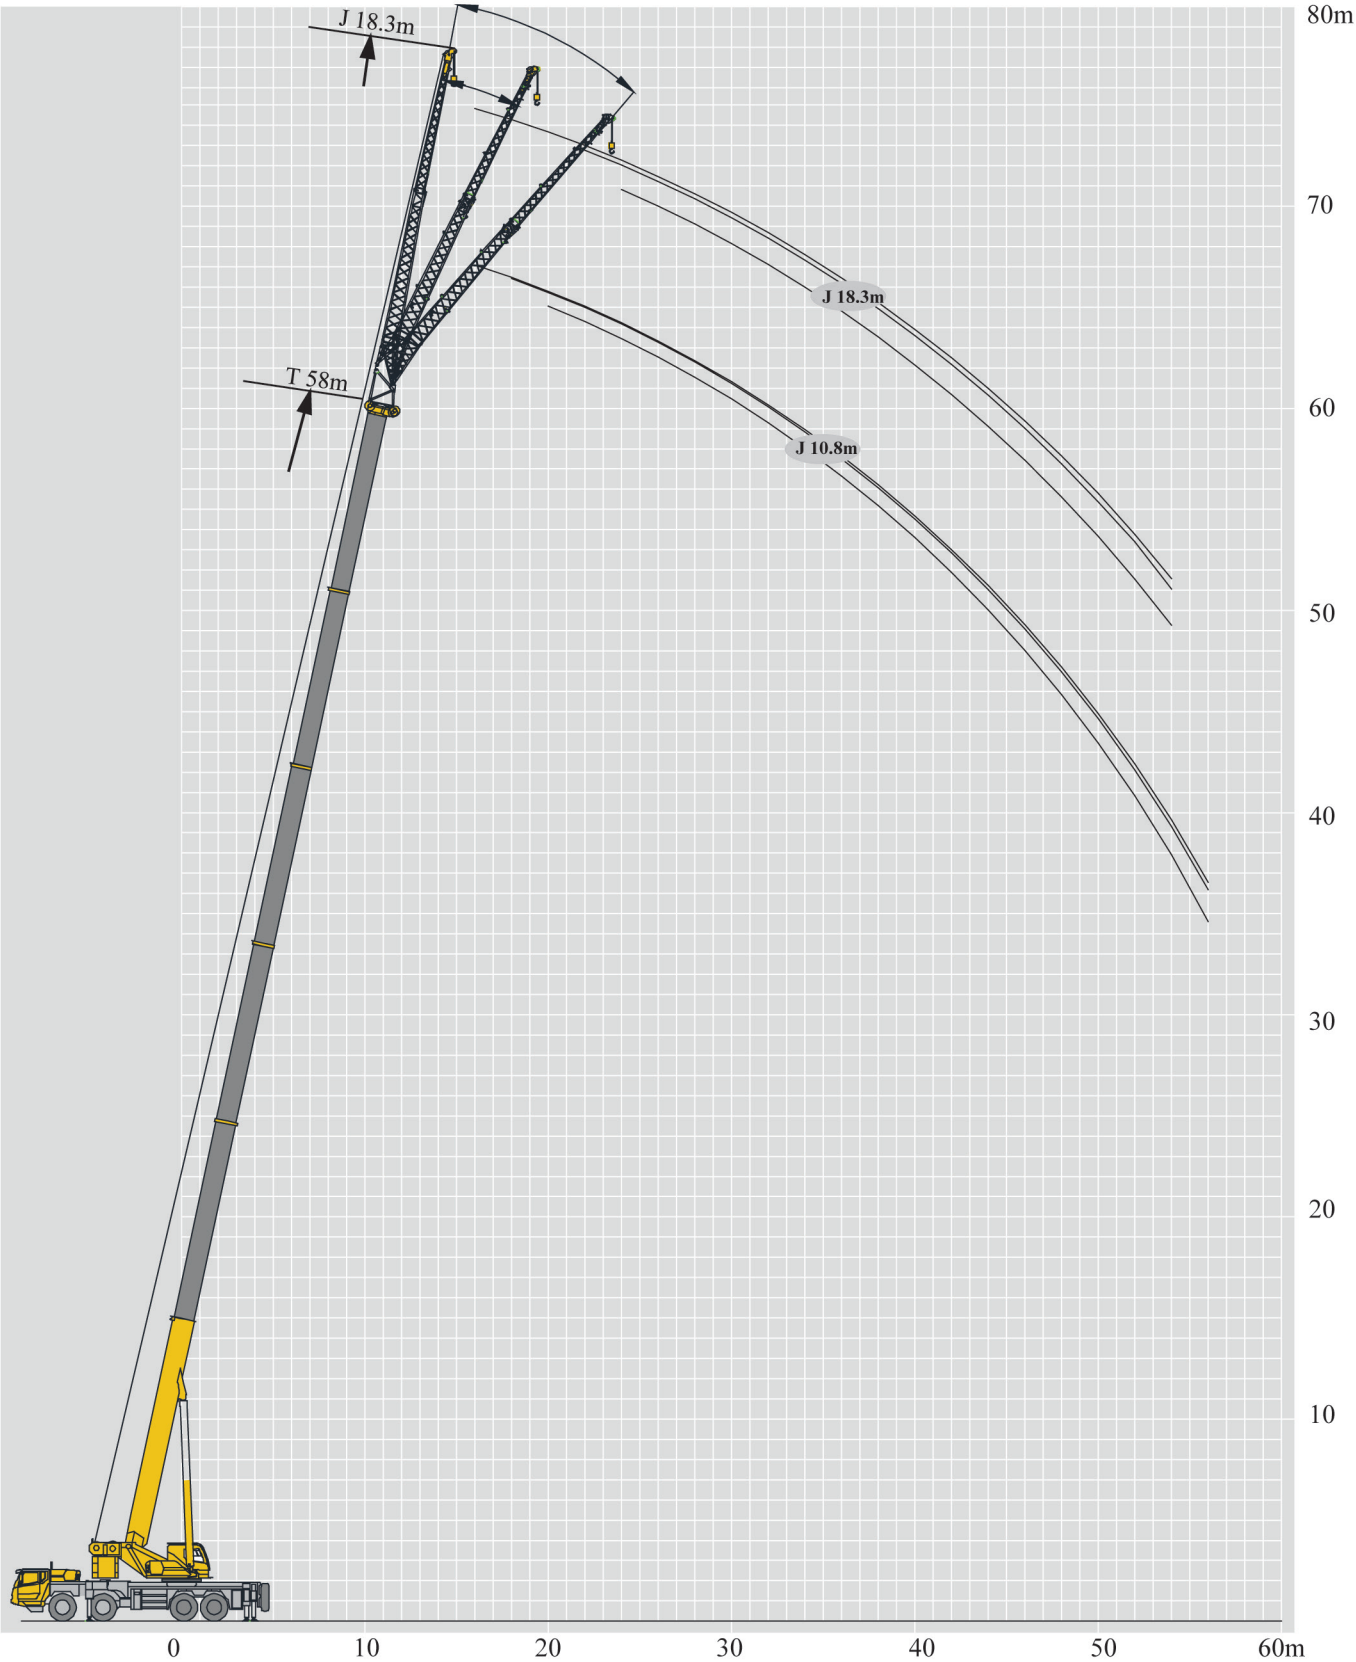


起重性能表
Lifting capacities


J 10.8m/18.3 m



	50.2m			54.4 m			58 m			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	
12	7									12
14	7			7						14
16	7	6.2		6.9	6.1		6.6			16
18	6.8	5.8	4.5	6.6	5.8	4.5	6.6	5.8		18
20	6.5	5.7	4.3	6.5	5.7	4.3	6.5	5.7	4.3	20
22	6.3	5.5	4.2	6.3	5.5	4.2	6.3	5.5	4.2	22
24	6	5.3	4.1	6.1	5.3	4.1	5.7	4.9	4.1	24
26	5.8	5.1	4	5.8	5.1	4	5	4.5	4	26
28	5.6	5	3.9	4.6	5	3.9	4.2	4.5	3.9	28
30	5	4.5	3.9	4.5	4.4	3.9	3.8	3.6	3.9	30
32	4.4	4.3	3.8	4.5	4.4	3.6	3.8	3.4	3.1	32
34	4.4	4	3.8	3.4	3.3	3.6	3.8	3.4	3.1	34
36	4.4	4	3.7	3.4	3.3	3.6	3.1	3.4	3.1	36
38	4	3.5	3.6	3.4	3.3	3.6	2.8	2.6	3.1	38
40	3.3	3.2	3.5	3.4	3.3	3.5	2.8	2.5	3.1	40
42	3.3	3	3.4	2.5	2.5	2.7	2.2	2.5	2.3	42
44	3.3	3	3.2	2.5	2.5	2.7	2.1	2.5	2.3	44
46	2.8	2.8	2.8	2.5	2.5	2.7	2.1	1.9	2.3	46
48	2.5	2.5	2.8	2.3	2.4	2.5	2.1	1.9	2.3	48
50	2.3	2.3	2.4	2	2.1	2.2	1.6	1.9	1.7	50
52				1.7	1.8	1.9	1.6	1.8	1.7	52
54						1.6	1.4	1.4	1.6	54
56							1.2	1.3	1.3	56
组合	12222			22222			33333			组合




	50.2m			54.4 m			58 m			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	
14	4.3									14
16	4			3.8			3.8			16
18	3.8	3.3		3.7			3.7			18
20	3.7	3.2		3.5	3.2		3.5			20
22	3.5	3.1	2.6	3.4	3.1		3.3	3.1		22
24	3.4	3.1	2.6	3.3	3.1	2.6	3.3	3	2.5	24
26	3.2	2.9	2.5	3.1	2.9	2.5	3	2.8	2.4	26
28	3.1	2.8	2.4	3	2.8	2.4	2.8	2.7	2.3	28
30	3	2.7	2.3	2.8	2.7	2.3	2.6	2.5	2.2	30
32	2.8	2.6	2.2	2.6	2.5	2.2	2.5	2.4	2.2	32
34	2.6	2.5	2.2	2.5	2.4	2.2	2.4	2.4	2.1	34
36	2.5	2.4	2.1	2.4	2.4	2.1	2.3	2.3	2.1	36
38	2.4	2.3	2.1	2.3	2.3	2.1	2.1	2	2.1	38
40	2.3	2.3	2.1	2.2	2.2	2.1	1.8	1.8	2	40
42	2.2	2.2	2	2.1	1.9	2	1.8	1.8	1.9	42
44	2.1	2.1	2	1.7	1.9	2	1.8	1.8	1.5	44
46	2	2	2	1.6	1.8	1.9	1.5	1.8	1.5	46
48	2	1.9	1.9	1.6	1.7	1.8	1.4	1.5	1.5	48
50	1.9	1.8	1.8	1.5	1.6	1.5	1.4	1.4	1.5	50
52	1.8	1.7	1.7	1.5	1.4	1.5	1.4	1.4	1.5	52
54	1.5	1.6	1.5	1.3	1.4	1.5	1.1	1.4	1.2	54
组合	12222			22222			33333			组合

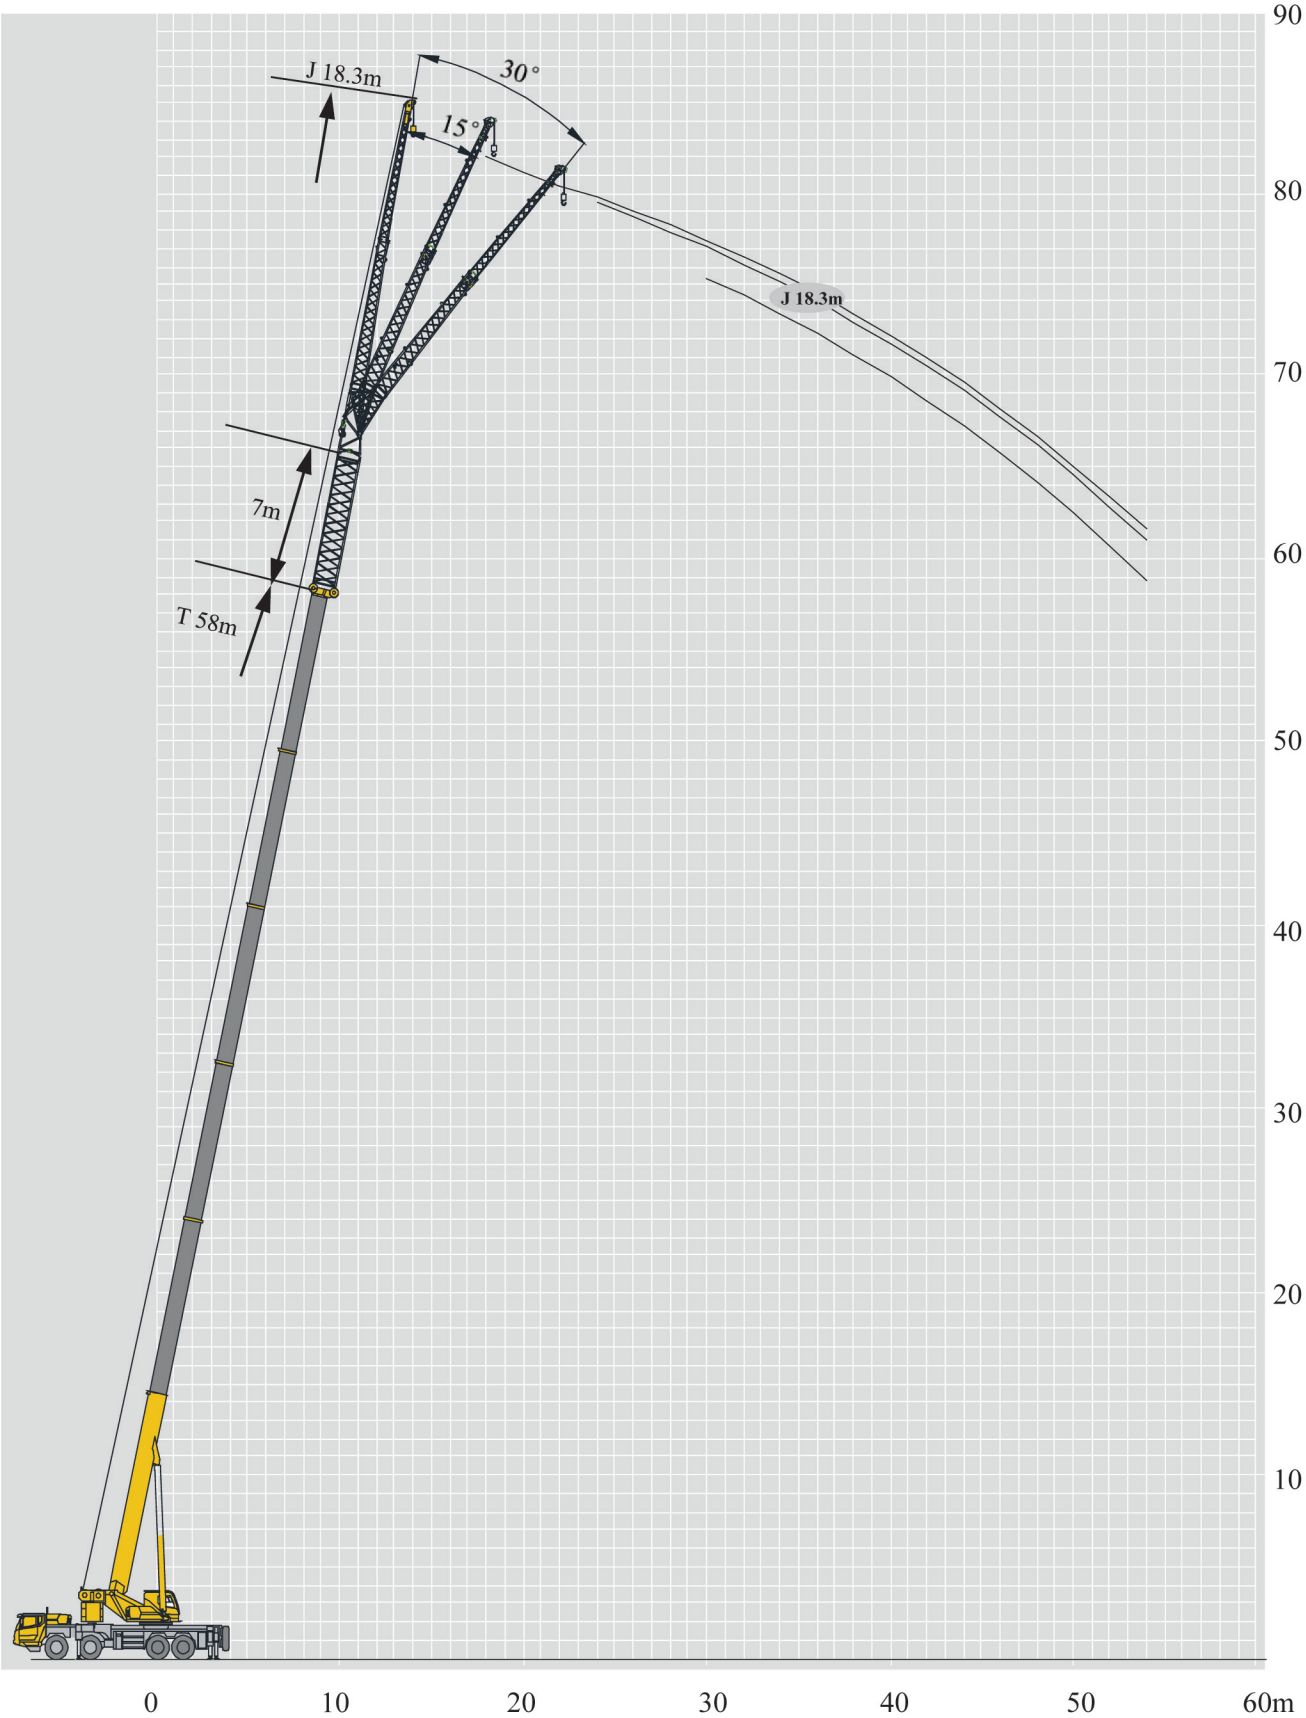

起重性能表
Lifting capacities

I 7m



	50.2+7			54.4+7			58+7			
	18.3 m									
	0°	15°	30°	0°	15°	30°	0°	15°	30°	
16	3.7									16
18	3.6			3.5			3.4			18
20	3.5			3.4			3.3			20
22	3.4	3.1		3.3			3.3			22
24	3.3	3.0		3.3	3.0		3.1	2.9		24
26	3.2	2.9		3.1	2.9		3.0	2.8		26
28	3.1	2.8	2.4	3.0	2.8	2.4	2.8	2.7		28
30	3.0	2.7	2.3	2.8	2.7	2.3	2.6	2.5	2.2	30
32	2.8	2.6	2.2	2.6	2.5	2.2	2.5	2.4	2.2	32
34	2.6	2.5	2.1	2.5	2.4	2.1	2.4	2.3	2.1	34
36	2.5	2.4	2.0	2.3	2.3	2.1	2.3	2.3	2.1	36
38	2.4	2.3	2.0	2.3	2.3	2.0	2.0	1.9	2.0	38
40	2.3	2.2	2.0	2.2	2.2	2.0	1.7	1.7	1.9	40
42	2.2	2.1	1.9	2.1	1.8	2.0	1.7	1.7	1.8	42
44	2.1	2.0	1.9	1.6	1.8	1.9	1.7	1.7	1.4	44
46	2.0	1.9	1.9	1.6	1.7	1.8	1.4	1.7	1.4	46
48	2.0	1.8	1.8	1.6	1.6	1.7	1.3	1.4	1.4	48
50	1.9	1.7	1.7	1.4	1.5	1.4	1.3	1.3	1.4	50
52	1.8	1.6	1.6	1.4	1.3	1.4	1.3	1.3	1.4	52
54	1.5	1.5	1.4	1.2	1.3	1.4	1.0	1.3	1.1	54
56	1.5	1.5	1.4	1.2	1.3	1.4				56
组合	12222			22222			33333			组合